
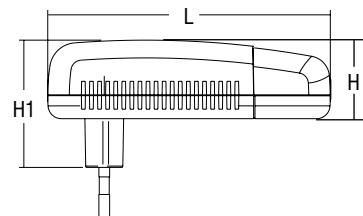


Alimentatori elettronici a spina in corrente continua per power LED e moduli LED

Direct current electronic plug drivers for power LED and LED modules



Articolo Article	Codice Code	W	V out DC	I out DC	ta °C	tc °C	λ max.	Dimensioni - Dimensions (mm)				Peso Weight gr.	Pezzi Pcs
								L	B	H	H1		
Uscita in corrente costante - Constant current output													
DC 10W 350mA SP	122270	10	28	350mA cost.	0 +45	65	0,6 C	105	44	30	46	190	20
Uscita in tensione costante - Constant voltage output													
DC 10W 12V SP	122280	10	12	0,83A	0 +45	65	0,6 C	105	44	30	46	190	20
DC 10W 24V SP	122274	10	24	0,42A	0 +45	65	0,6 C	105	44	30	46	190	20

Massima distanza LED a pagina 99 - Max. LED distance at page 99

Esempi di applicazioni Examples of application		Colori Colours
10 W 350mA	max. 7/8 Power LED 1 W	bianco - blu - verde - giallo - rosso white - blue - green - yellow - red

Norme di riferimento

Reference Norms:

EN 50172 (VDE 0108)
EN 55015
EN 60598-2-22
EN 61000-3-2
EN 61347-1
EN 61347-2-13
EN 61547
VDE 0710-T14

Lampade

Lamps:

Power LED
LED modules

Tensione Nominale Rated Voltage

220 ÷ 240 V

Frequenza Frequency

50...60 Hz

Tensione di utilizzo AC AC Operation range

198 ÷ 264 V

Tensione di utilizzo DC DC Operation range

176 ÷ 264 V

Potenza

Power

0 ÷ 10 W

- Alimentatore indipendente IP20, per uso interno.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Fissaggio dell'alimentatore tramite innesto polarizzato.
- Protezioni:
 - termica e cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi.
- Possibilità di accensione e spegnimento sul secondario per LED alimentati in corrente (power LED).
- A richiesta disponibile versione con plastica trasparente (122xxxT) e nera (122xxxN).

- IP20 independent driver, for indoor use.
- Class II protection against electric shock following direct or indirect contact.
- Driver can be secured by means of a polarized coupling.
- Protections:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads.
- Can be switched on and off on secondary circuit for power LED.
- Version available upon request whit transparent (122xxxT) and black (122xxxN) housing.

LED
LED