


200 Watt
CV
Dimmable
Dimmable 0/1..10
DALI Dimmable
PF λ ≥ 0,96
IP 20
CE
EMC
SELV
M
M
F
110

t<sub>a</sub> -10° ÷ +40°C
DIN 35mm



### 🇮🇹 Interfaccia DALI/PUSH + 0-10V o 1-10V x sistemi DIN RAIL

- Comando DALI/pulsante + 0-10V o 1-10V
- Alimentazione 12V ÷ 24V/DC
- Comanda carichi resistivi fino a 12A
- Uscita PWM 300Hz

### 🇬🇧 DALI/PUSH + 0-10V o 1-10V interface

- Dimming control by DALI/PUSH + 0-10V od 1-10V signal
- Input 12V ÷ 24V/DC
- For resistive loads up to 12A
- PWM 300Hz output

### 🇩🇪 DALI/PUSH + 0-10V o 1-10V Interface



- Dimmbar \_ [f DALI/Taster + 0-10V oder 1-10V Signal.
- Eingang: 12V ÷ 24V/DC
- Für ohmsche Lasten bis 12A
- Ausgang PWM 300Hz

### 🇫🇷 Interface DALI/PUSH + 0-10V o 1-10V

- Régulateur de luminosité avec commande DALI/ bouton-pous-soir+ 0-10V ou 1-10V
- Alimentation 12V ÷ 24V/DC
- Alimentation de charges résistives jusqu'à 12A
- Sortie PWM 300Hz

### 🇪🇸 Regulador DALI/PUSH + 0-10V o 1-10V

- Regulador con protocol DALI/pulsador + 0-10V o 1-10V
- Entrada 12V ÷ 24V/DC
- Para cargas resistivas hasta 12A
- Salida PWM 300Hz

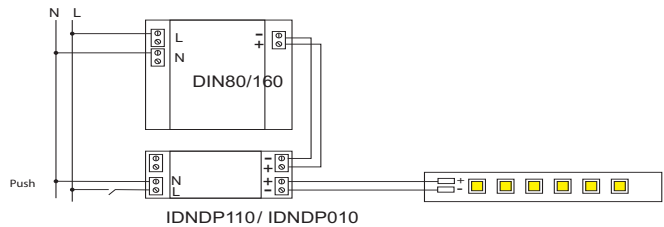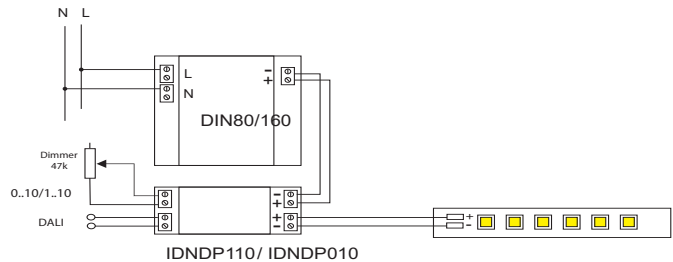

Part number	SIGNAL	INPUT		OUTPUT		Watt	Dimensions A x B x C
		Min	Max	I Max	V Max		
A40IDNDP0100	DALI/PUSH/0-10V	12	24	12A	V <sub>in</sub> -0,5V	200W	90 x 36 x 61
A40IDNDP1100	DALI/PUSH/1-10V	12	24	12A	V <sub>in</sub> -0,5V	200W	90 x 36 x 61